

THERMO-MECHANICAL STABILITY AND VIBRATION ANALYSIS OF COMPOSITE SHELLS

J. Girish and L.S.Ramachandra

*Department of Civil Engineering, Indian Institute of Technology, Kharagpur-721302, India.
E-mail: lsr@civil.iitkgp.ernet.in*

The postbuckling and postbuckled vibration analysis of curved panels subjected to thermo-mechanical loading is presented here. The formulation is based on the modified Sanders' theory incorporating the geometric nonlinearities. The multi-term Galerkin's technique is used to obtain the true postbuckled shape of curved panels, postbuckled frequencies and associated mode shapes.

The buckling and postbuckling behavior of laminated cylindrical shells are investigated extensively and reported in the literature. However relatively less work has been done in the area of postbuckled free vibration analysis of laminated curved panels under thermo-mechanical loading. Librescu et al. [1-3] presented the analytical results of simply supported single-layer and three-layer flat and curved panels made from transversely isotropic materials. The authors solved the nonlinear boundary-value problem using Airy's stress function and one-term Galerkin's approximation.

Most of the analytical results presented in the literature are based on the Donnell approximation. The main advantage of the Donnell approach is the possibility of using Airy stress function F , where by the number of unknown functions is reduced from three (u, v, w) to two (w, F). This reduction from three to two may affect the lowest eigenvalue. Sheinman and Goldfeld [4] investigated the validity of the w - F formulation vs its u - v - w counterpart and showed that the w - F fails to bring out the lowest buckling load accurately.

The present study is focused on postbuckling and postbuckled vibration analysis of curved panels subjected to thermo-mechanical loading. The formulation is based on the modified Sanders' theory incorporating the geometric nonlinearities. The higher-order shear deformation displacement field used in the present study is that of Reddy and Liu [5], which accounts for parabolic distribution of transverse shear strains through thickness and tangential stress-free boundary conditions on the boundary surfaces of the shell. The multi-term Galerkin's technique is used to obtain the true postbuckled shape of the shell and different modes of vibration frequencies.

Adopting Galerkin's procedure, the governing nonlinear partial differential equations are converted into a set of nonlinear algebraic equations in the case of postbuckling analysis and nonlinear ordinary differential equations in the case of free vibration analysis. The critical buckling temperature is obtained from the solution of linear eigenvalue problem. The postbuckled equilibrium paths are obtained by solving the nonlinear algebraic equations, using the Newton-Raphson iterative procedure. In the case of free vibration analysis of buckled panel, the solution of differential equations is assumed to be the sum of time dependent solution (vibration amplitude) and time independent solution (postbuckling deflection). The vibration amplitude is considered small compared to the postbuckled deflection and hence higher order time dependent terms are neglected. The free vibration frequencies of a postbuckled plate about the static equilibrium state are obtained by solving the eigenvalue problem for different postbuckled deflections.

Numerical results are presented for curved composite panels with and without initial geometric imperfections. The modal participation of each mode in the postbuckling deflection is presented using multi-term Galerkin's procedure. The results show the thermo-mechanical load interaction on buckling, limiting points and snap-through buckling. Apart from the fundamental mode, higher vibration modes of curved panels about the prebuckling and postbuckling equilibrium states subjected to thermo-mechanical loading are presented.

Response of doubly curved shell panels subjected to thermo-mechanical loads: The nonlinear equilibrium paths of doubly curved shell panels under combined thermal and mechanical loads are presented in Figure 1. The simply supported boundary conditions at all edges are considered. The curves are obtained for nondimensional load parameter q^* ($q_0 R_2/E_2 h^2$) vs. nondimensional central deflection (w/h). Four different temperature loadings are considered in addition to the uniformly distributed mechanical load i.e., $T = 0, 20^\circ\text{C}, 40^\circ\text{C}$ and 60°C . As the thermal load is increased, the limit point is reached at higher mechanical load as shown in the figure.

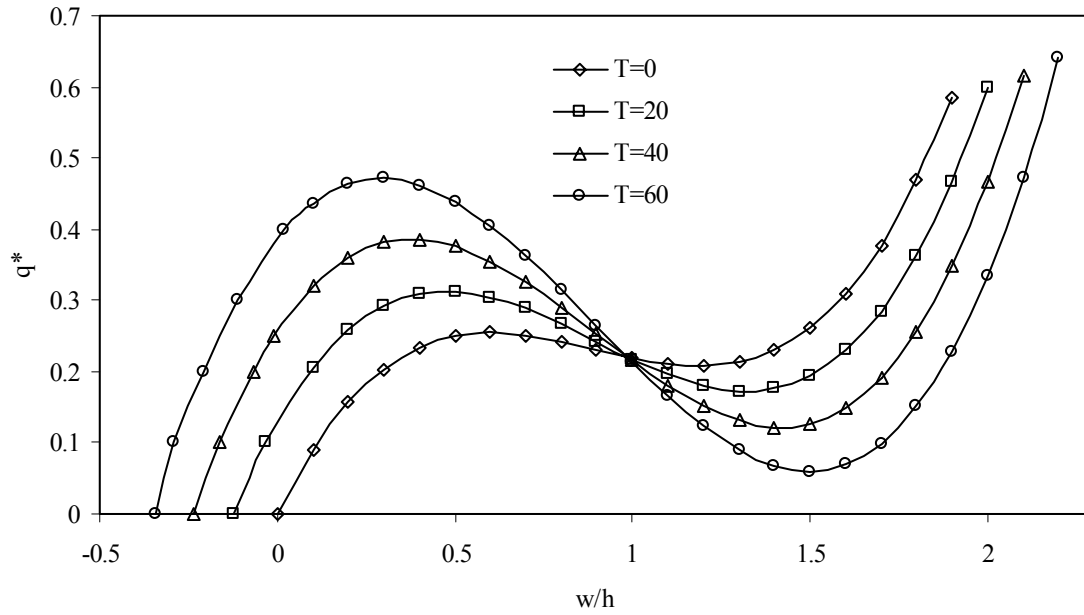


Figure 1: Response of doubly curved shell panel [0/90/0] subjected to thermo mechanical loads. ($a/b = 1$, $R_1/R_2 = R$, $q^* = q_0 R_2/E_2 h^2$, $E_1 = 25E_2$, $G_{12} = G_{13} = 0.5E_2$, $G_{23} = 0.2E_2$, $\nu_{12} = 0.25$, $\alpha_2/\alpha_1 = 3$)

References:

- [1] Librescu, L., Lin, W., Nemeth, M. P., and Starnes, J. H., "Vibration of Geometrically Imperfect Panels Subjected to Thermal and mechanical Loads", *Journal of Spacecraft and Rockets*, vol. 33, No. 2, 1996, pp. 285-291.
- [2] Librescu, L., Lin, W., Nemeth, M. P., and Starnes, J. H., "Frequency-Load Interaction of Geometrically Imperfect Curved Panels Subjected to Heating", *AIAA Journal*, vol. 34, No. 1, 1996, pp. 166-177.
- [3] Librescu, L., and Lin, W., "Vibration of Thermomechanically Loaded Flat and curved Panels Taking into Account Geometric Imperfections and tangential Edge Restraints", *Int. J. of Solids Structures*, vol. 34, No. 17, 1997, pp. 2161-2181.
- [4] Sheinman, I., and Goldfeld, Y., "Buckling of Laminated Cylindrical Shells In Terms of Different Theories and Formulations", *AIAA Journal*, vol. 39, No. 9, 2001, pp. 1773-1781.
- [5] Reddy, J.N., and Liu, C. F., "A Higher-Order Shear Deformation Theory of Laminated Elastic Shells", *Int. J. Engng Sci*, vol. 23, No. 3, pp. 319-330.